


**Figure 1**

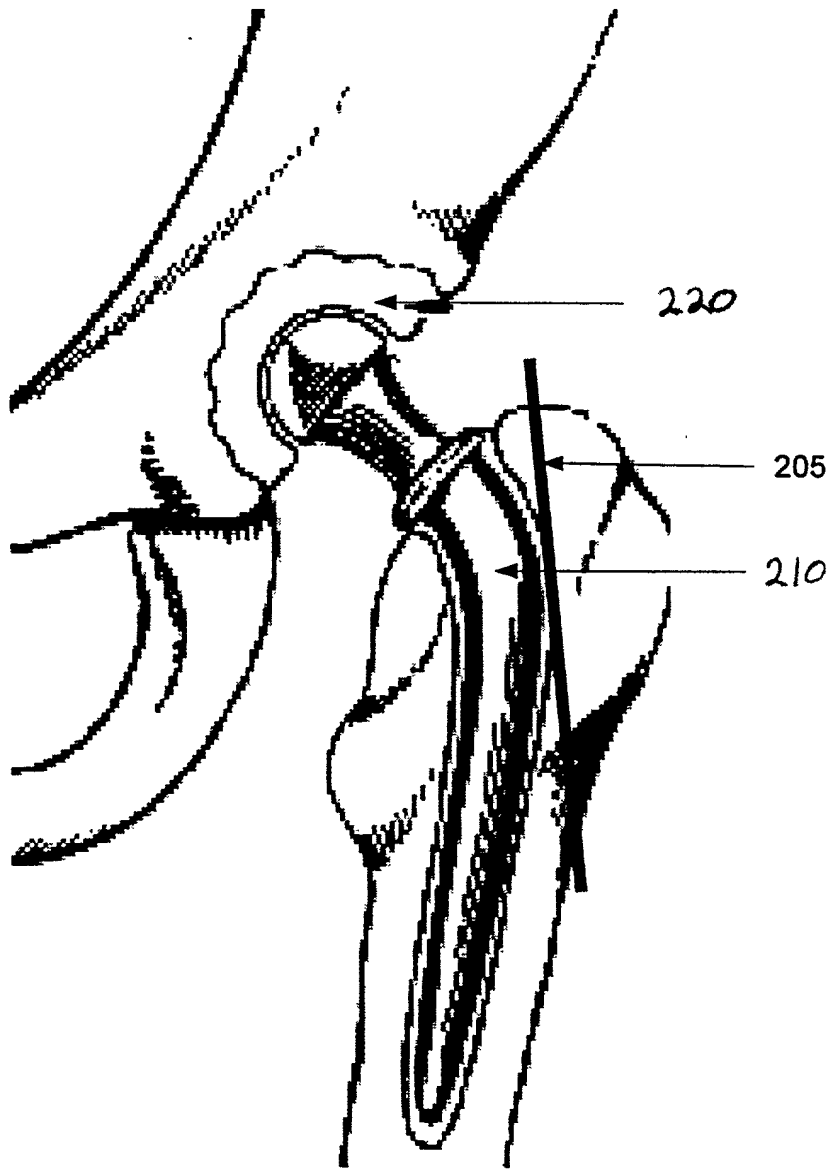

**Figure 2**

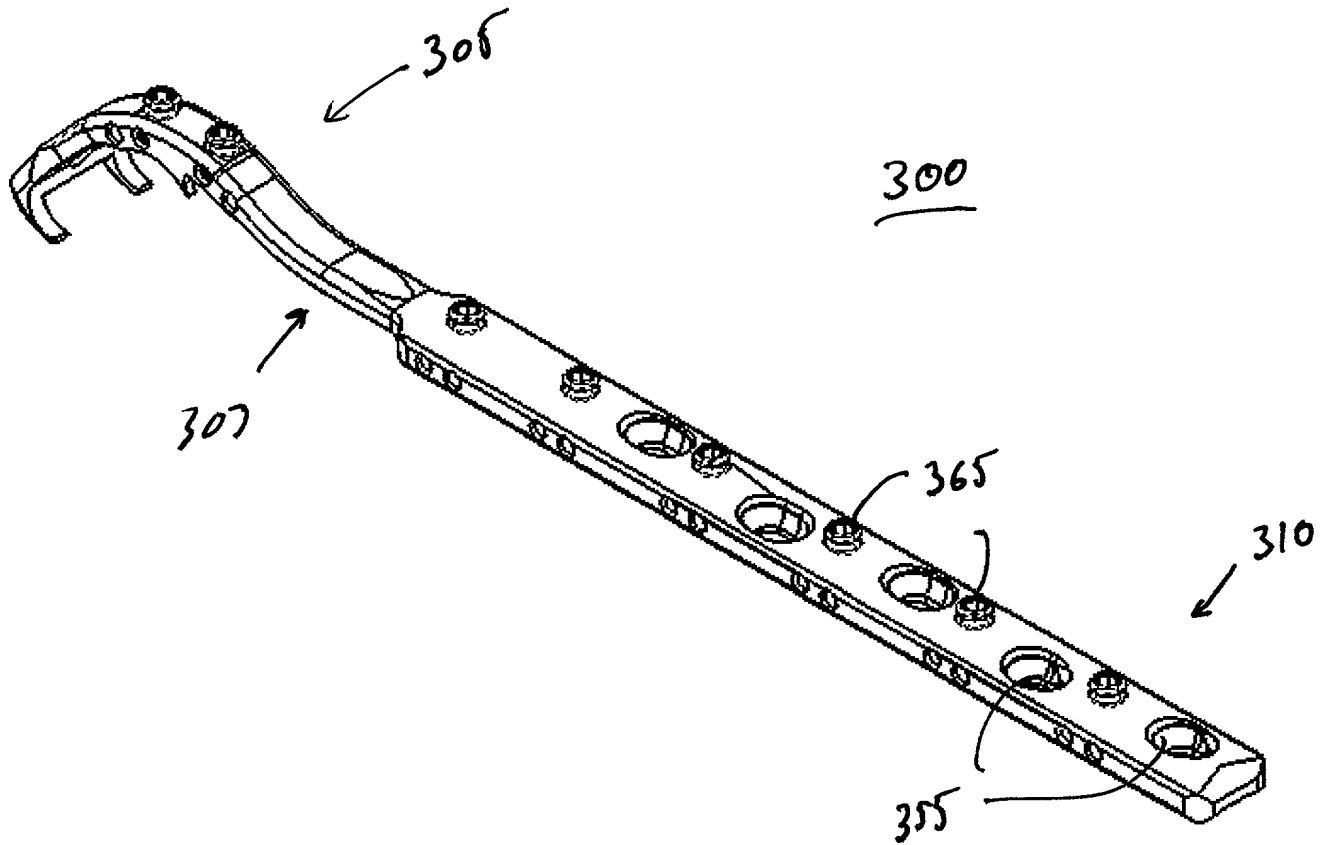


Figure 3

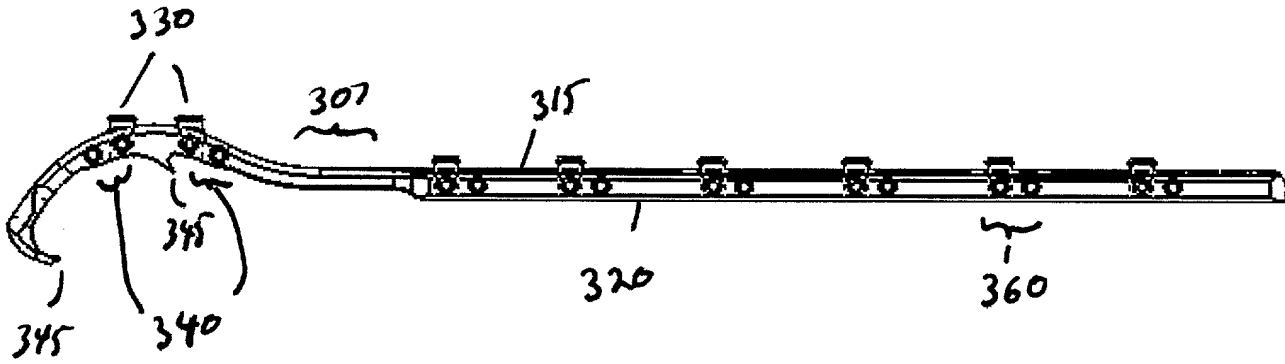
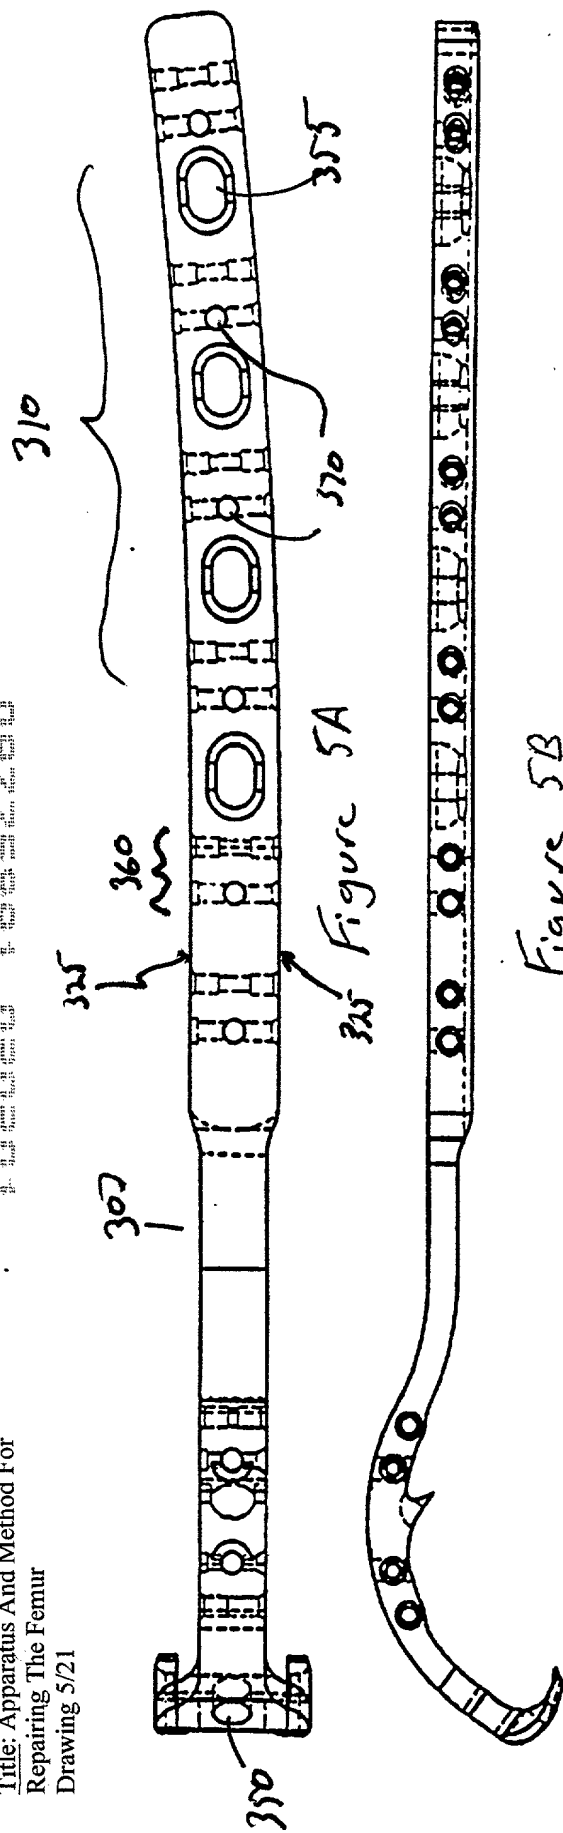


Figure 4

FIG. 5A is a perspective view of the apparatus of the present invention, showing the apparatus in a straight configuration. The apparatus includes a main body 310, a handle 320, and a distal end 330. The main body 310 is a long, narrow, rectangular member with a series of circular openings 340 along its length. The handle 320 is a shorter, wider member that is attached to the proximal end of the main body 310. The distal end 330 is a curved member that is attached to the distal end of the main body 310. The apparatus is shown in a straight configuration, but it is capable of being bent into a curved shape, as shown in FIG. 5B.



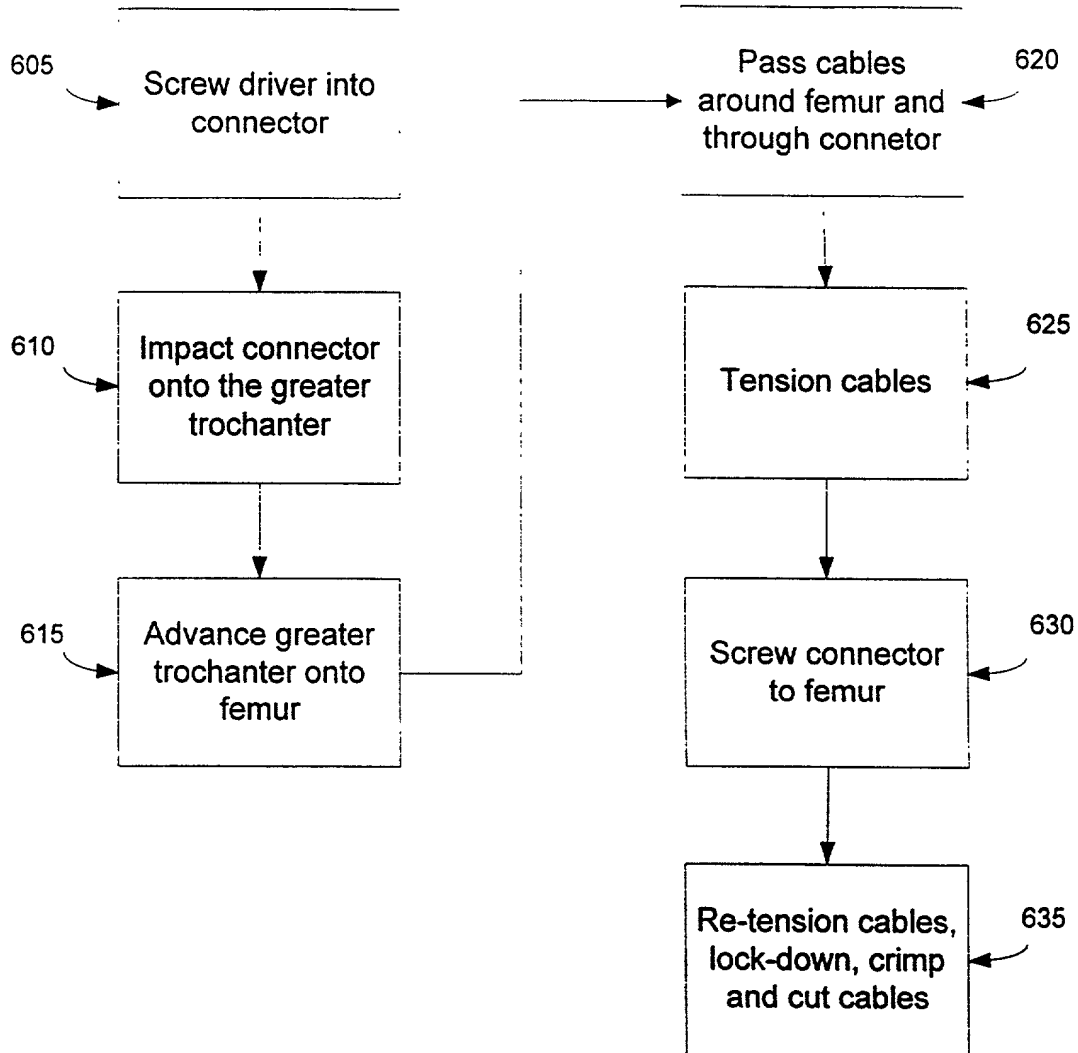


Figure 6

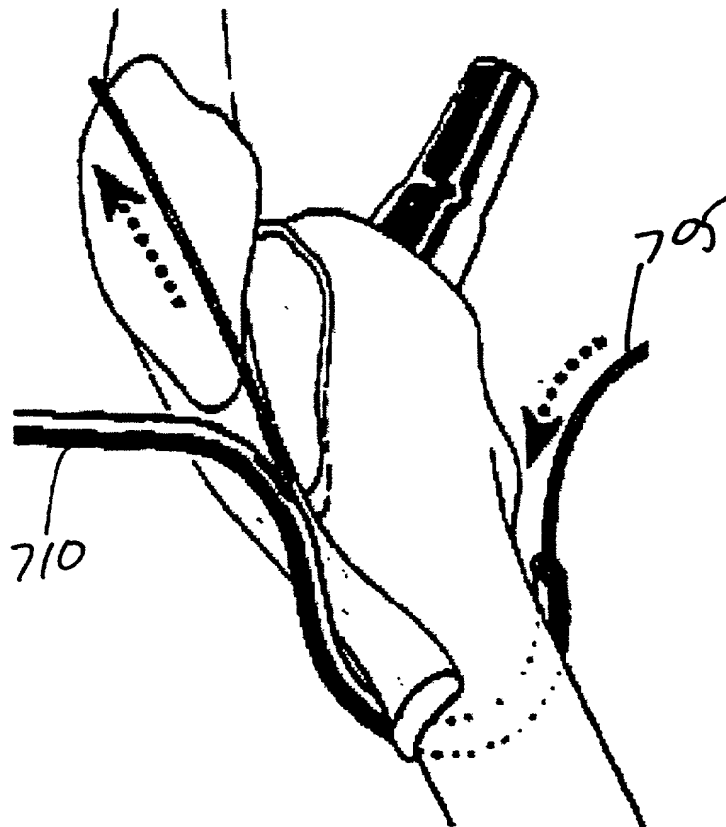


Figure 7



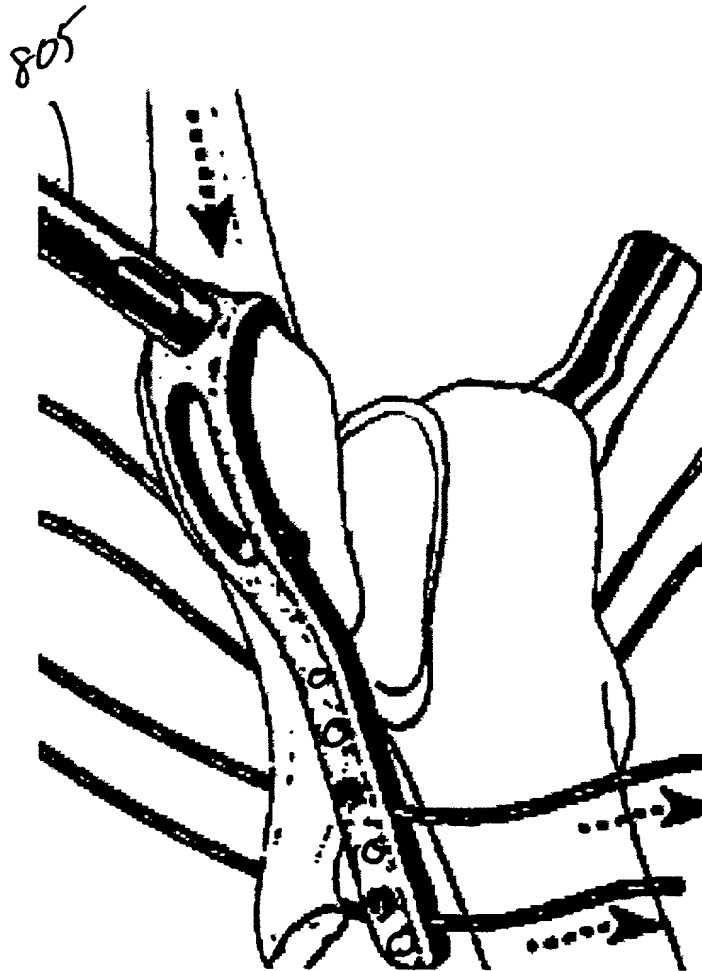


Figure 8




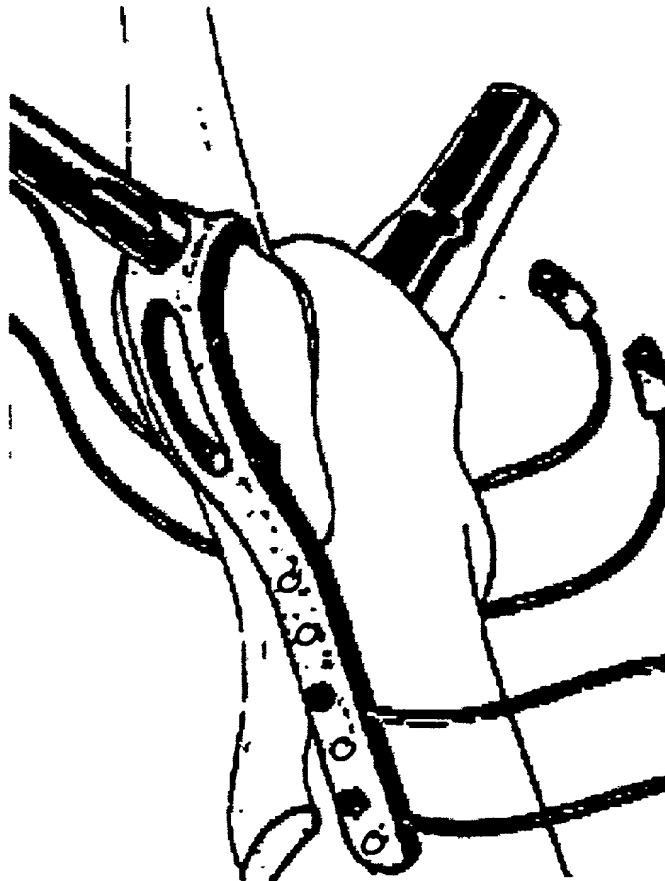


**Figure 9**

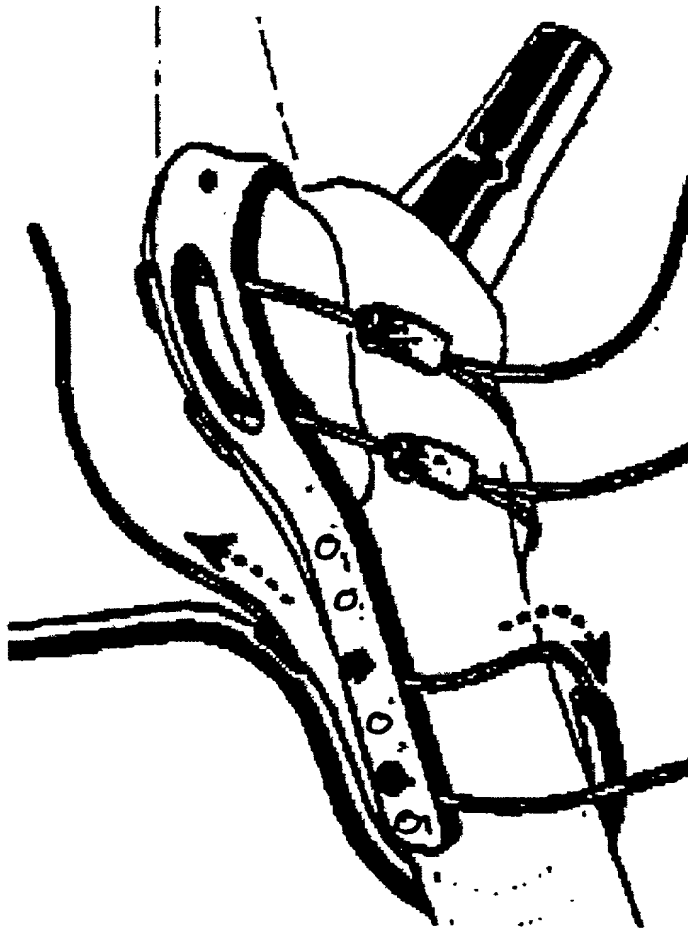

**Figure 10**

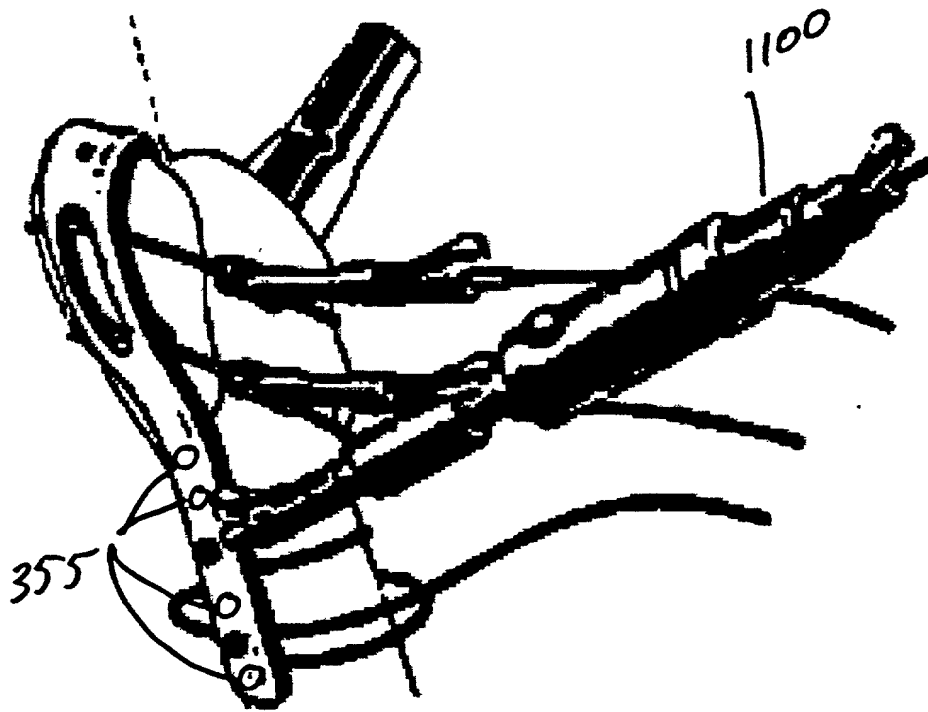

**Figure 11**

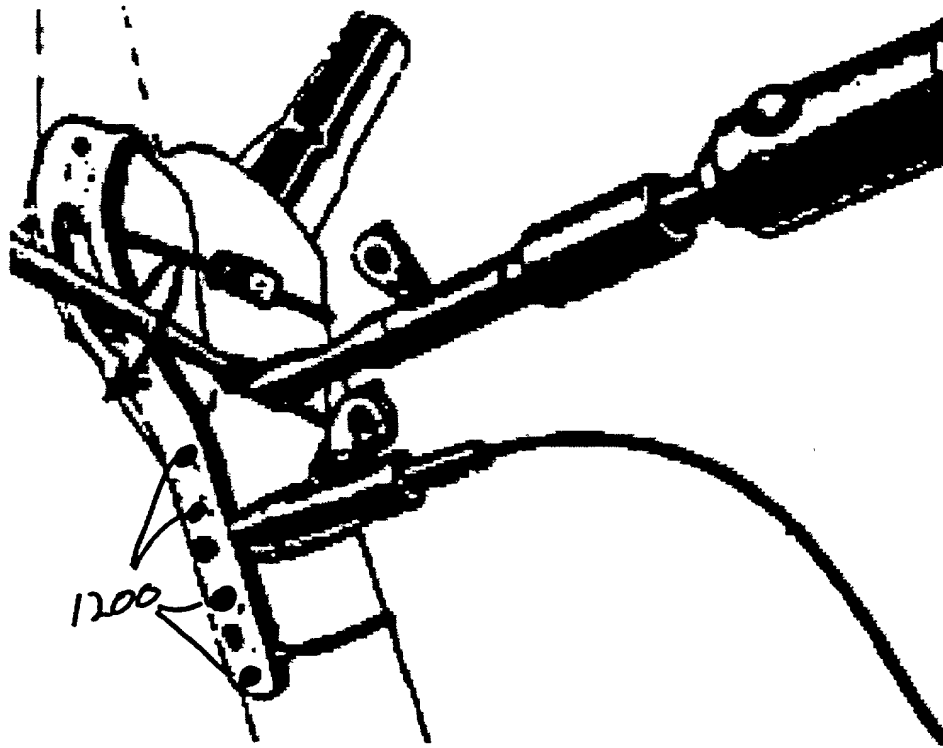

**Figure 12**

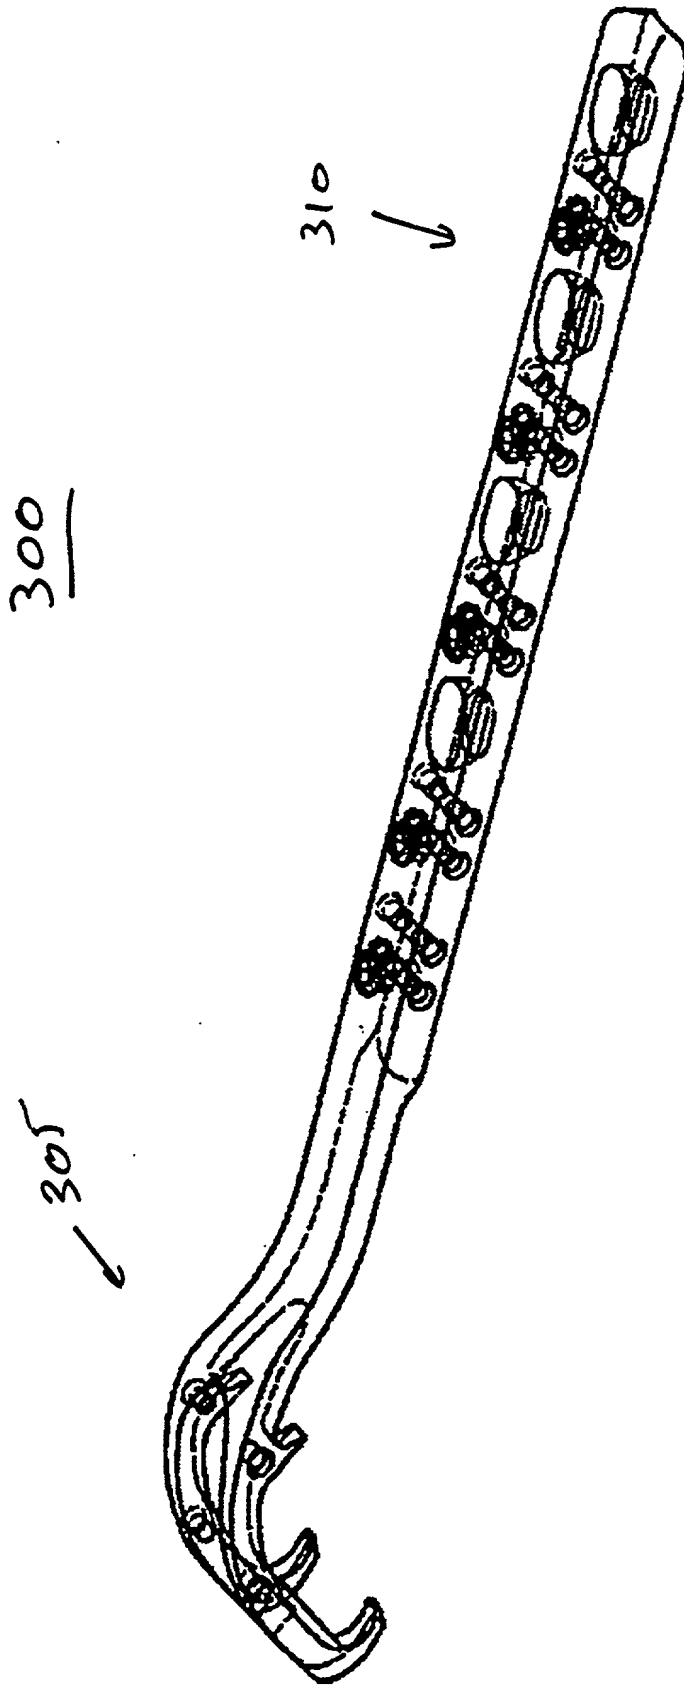


Figure 13

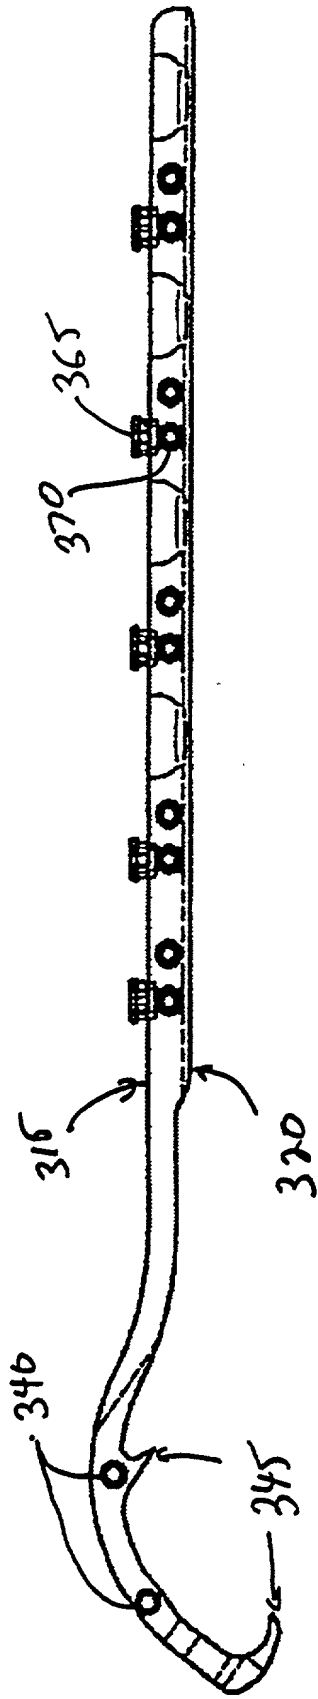


Figure 14A

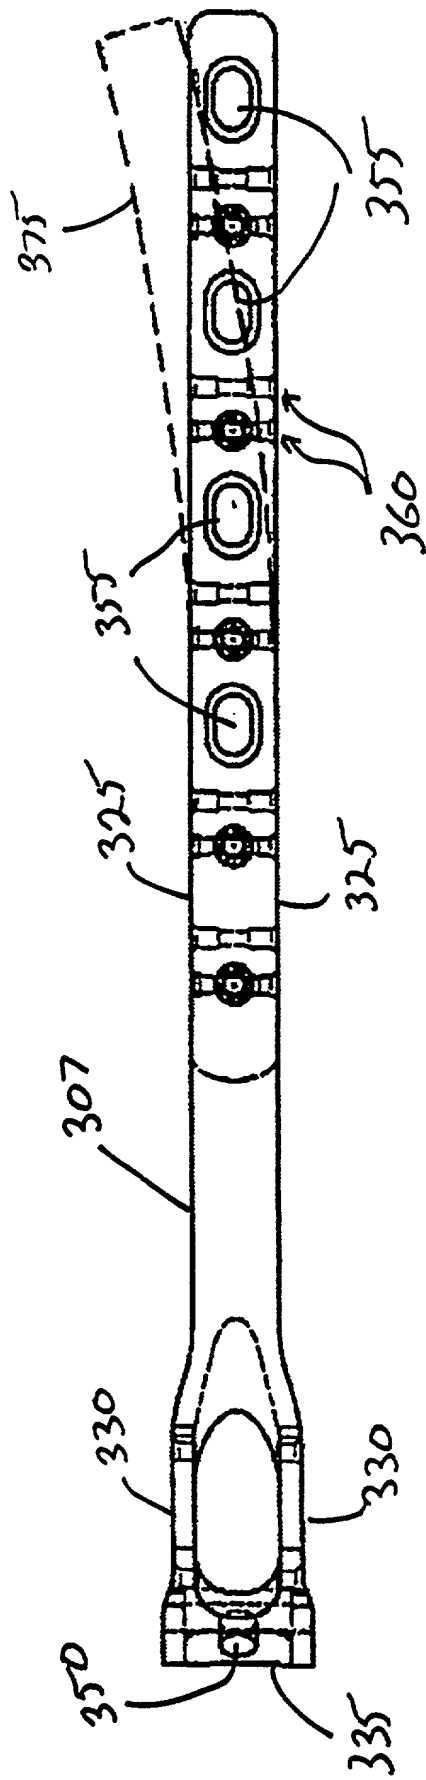


Figure 14B

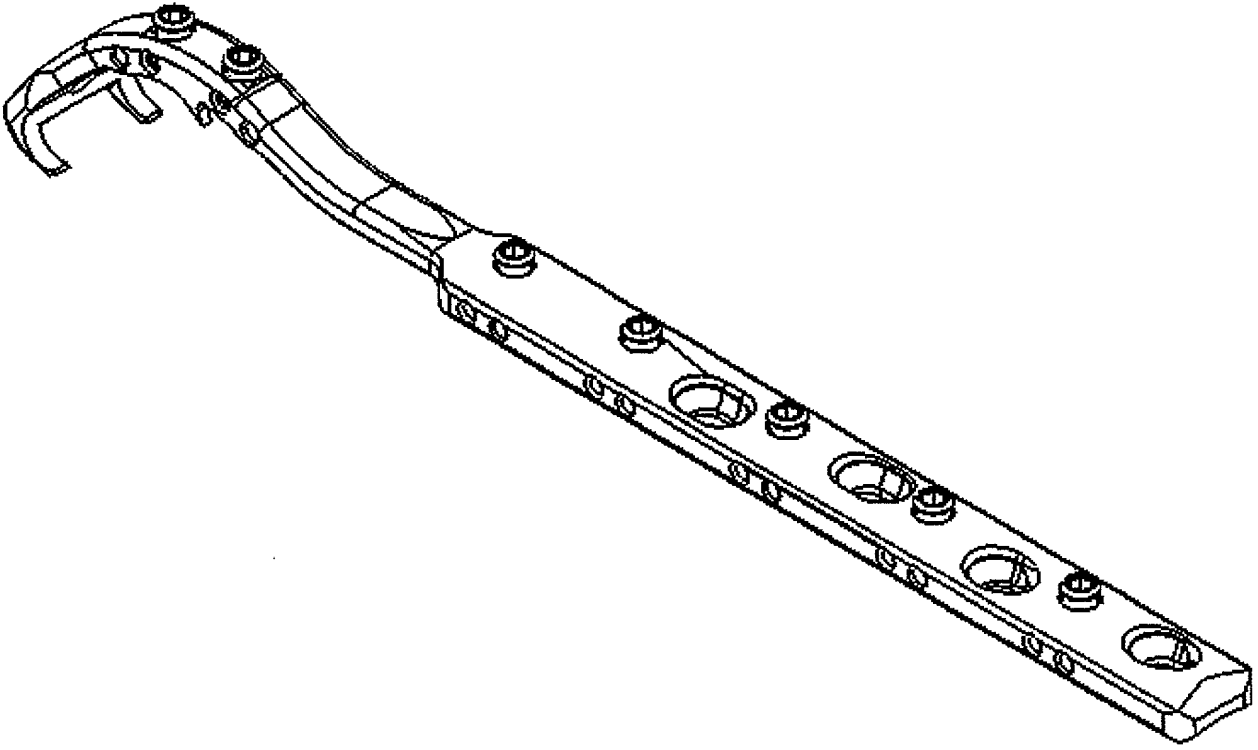


Figure 15

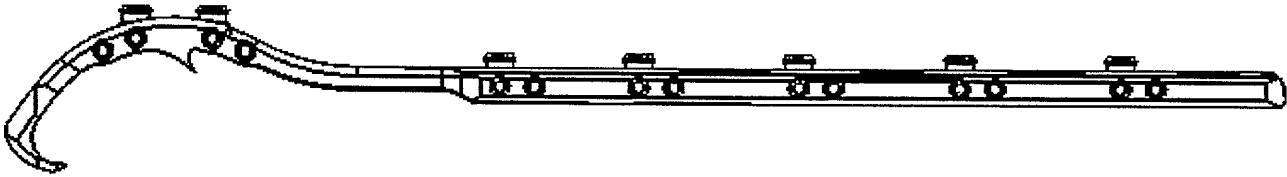


Figure 16






Figure 17

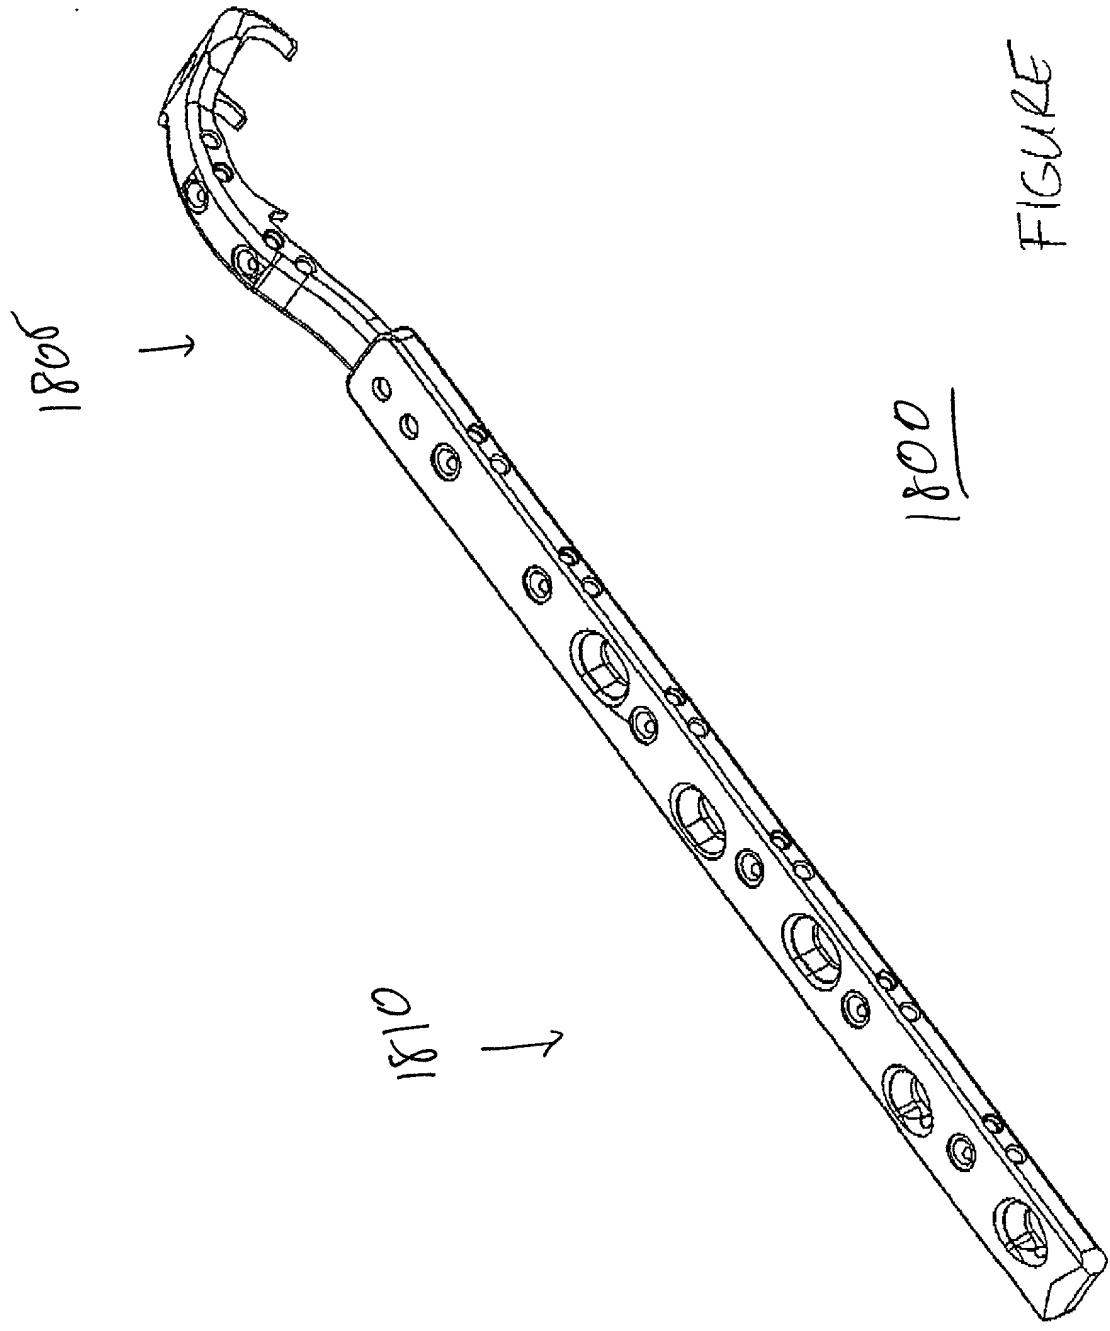


FIGURE 18

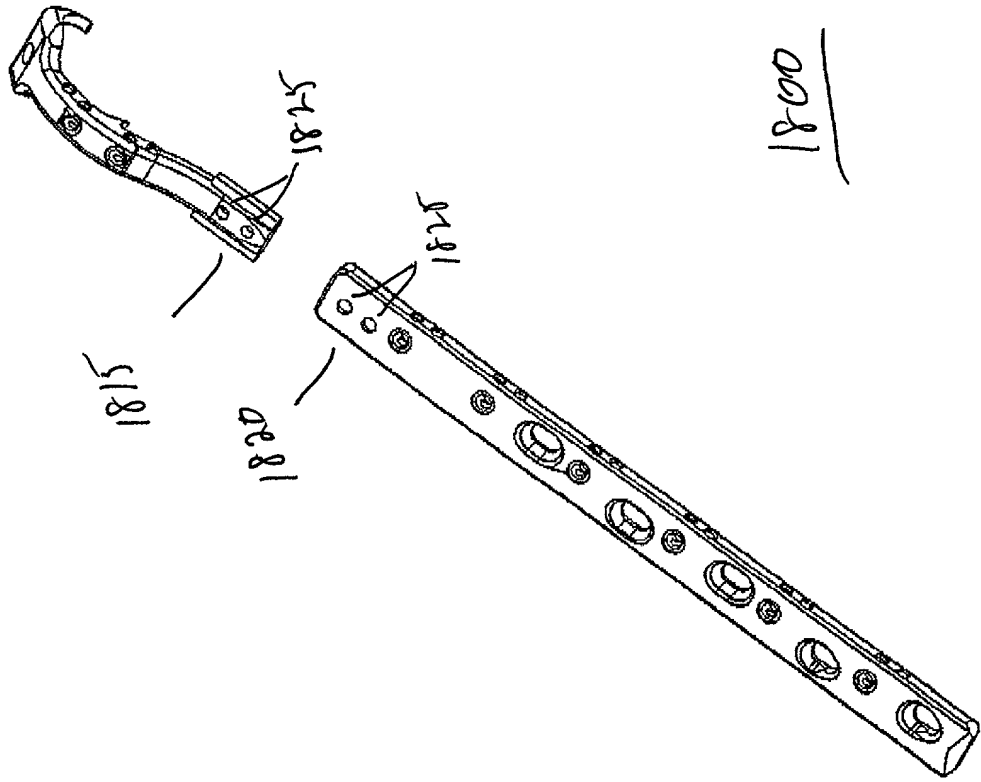


FIGURE 19

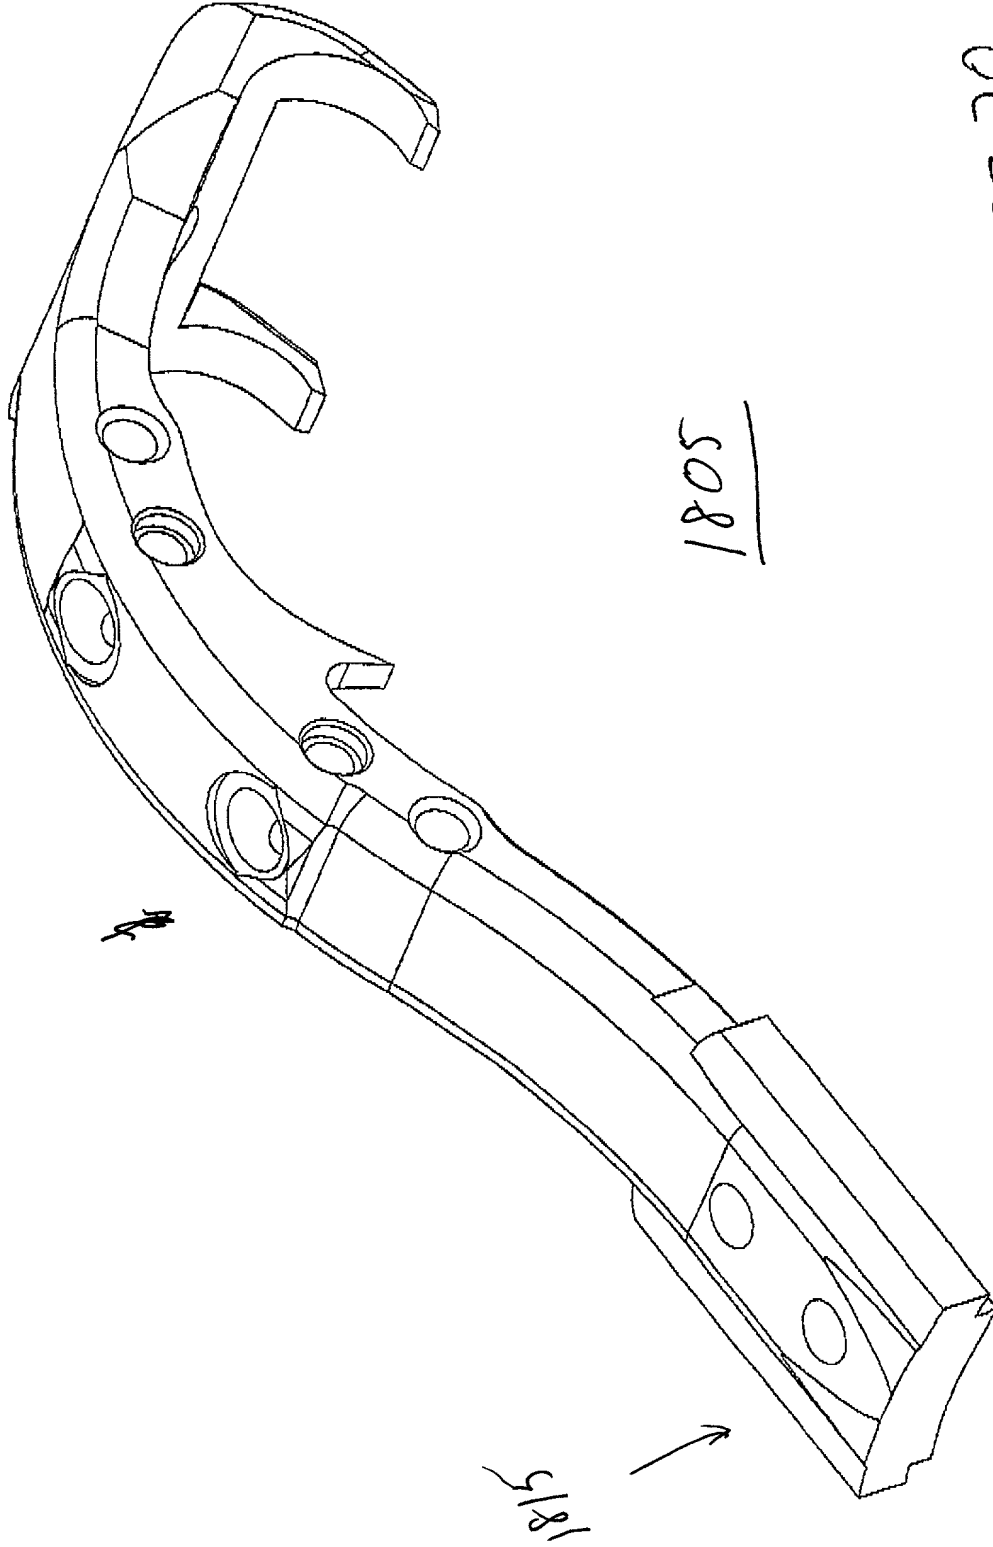


FIGURE 20

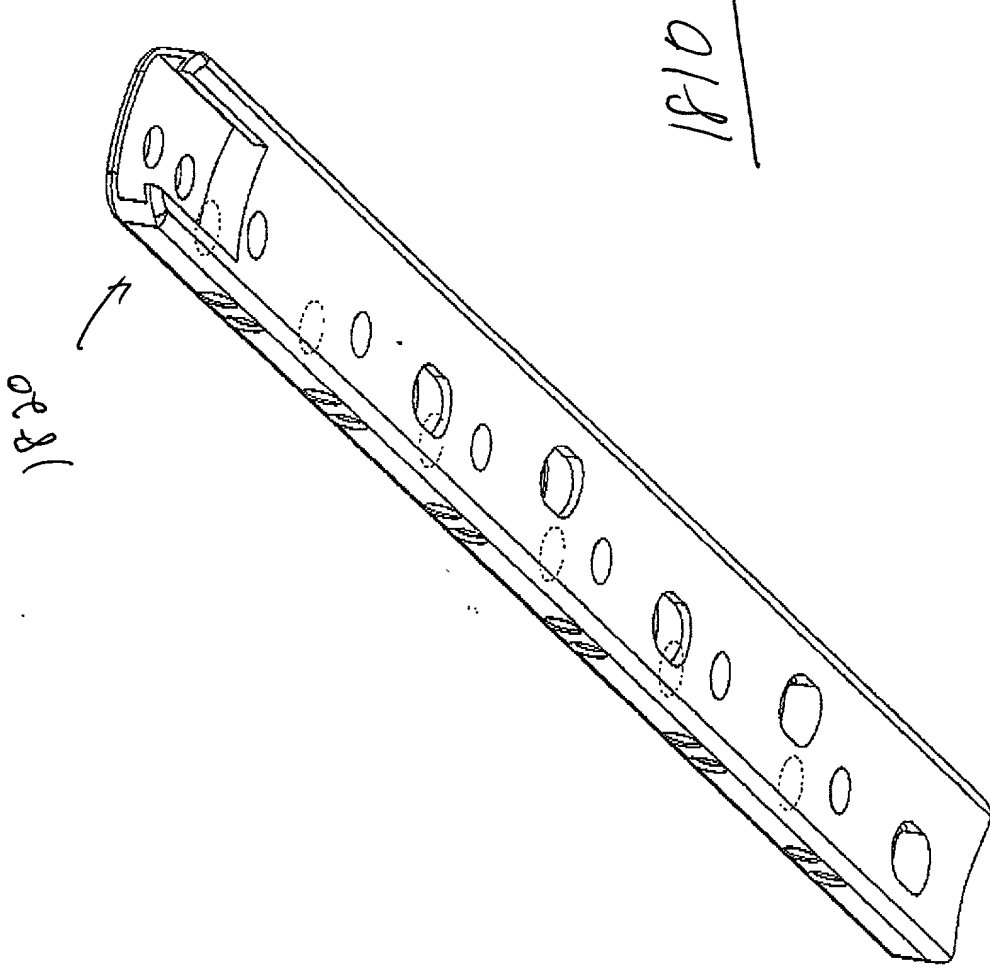


FIGURE 21